

R Series

4.0/4.5/5.0 T
Diesel

Options

- 2.0-5.0m duplex mast
- 2.5-5.0m full free duplex mast
- 4.3-6.5m triplex mast
- Special carriage and backrest
- Other dimension forks
- Dual drive wheel with fender
- Solid tyre
- Colored tyre(white、 green)
- Cabin
- Heater and air condition
- Fire extinguisher
- Semi-suspension seat or full-suspension seat
- Dual air cleaner or special air cleaner
- Rear working light
- Customer painting
- Auxiliary hydraulic valve modules
- High-mounted exhaust system
- Middle-mounted exhaust system
- Anti-fire spark exhaust device
- Diesel exhaust das purifier
- LPG swing-down bracket
- Radiator screen
- Sideshifter
- Integrated sideshifter
- Other attachment
- LPG fuel system(single、 dual)



CE CERTIFICATE



ISO14001: 1996



ISO9001: 2000



ZHEJIANG HANGCHA ENGINEERING MACHINERY CO.,LTD.
(ZHEJIANG HANGCHA IMP. & EXP. CO.,LTD.)

www.hcforklift.com

Addr: 398 Shi Qiao Road, Hangzhou 310022, P.R.China
Tel: +86-571-88135110 88126376 88135220 88125527 88130499(Ext. 8116, 8206, 8200)
Fax: +86-571-88132890 88126379
E-mail: sales@hcforklift.com



HCIE is authorized to deal with
the whole import & export business
of ZHEJIANG HANGCHA
ENGINEERING MACHINERY
CO.,LTD.



浙江杭叉工程机械股份有限公司
ZHEJIANG HANGCHA ENGINEERING MACHINERY CO.,LTD.

Zhejiang Hangcha Engineering Machinery Co., Ltd. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.


R series 4.0 ~ 5.0t forklift specification:

General		CPCD40			CPCD45			CPCD50																																																																																																																																																	
Type		RW5	RW19	RG24	RW5	RW19	RG24	RXW5	RXW19	RXG24																																																																																																																																															
1	Manufacture	CPCD																																																																																																																																																							
2	Basic model	CPCD40																																																																																																																																																							
3	Type	RW5 RW19 RG24 RW5 RW19 RG24 RXW5 RXW19 RXG24																																																																																																																																																							
4	Power type	Diesel																																																																																																																																																							
5	Rated capacity	4000			4500			5000																																																																																																																																																	
6	Load center	500			500			500																																																																																																																																																	
7	Lift height	3000			3000			3000																																																																																																																																																	
8	Free lift height	160			160			160																																																																																																																																																	
Characteristics & Dimensions		<table border="1"> <tr> <td>9</td> <td>Fork size</td> <td colspan="3">L×W×T 1070×150×50</td> <td colspan="3">1070×150×50</td> <td colspan="3">1070×150×55</td> </tr> <tr> <td>10</td> <td>Max tilt range</td> <td colspan="3">F/R 6/12</td> <td colspan="3">6/12</td> <td colspan="3">6/12</td> </tr> <tr> <td>11</td> <td>Fork overhang(Wheel center to fork face)</td> <td colspan="3">550</td> <td colspan="3">550</td> <td colspan="3">555</td> </tr> <tr> <td>12</td> <td>Rear overhang</td> <td colspan="3">520</td> <td colspan="3">560</td> <td colspan="3">560</td> </tr> <tr> <td>13</td> <td>Length to face of fork</td> <td colspan="3">3070</td> <td colspan="3">3110</td> <td colspan="3">3215</td> </tr> <tr> <td>14</td> <td>Overall width</td> <td colspan="3">1395</td> <td colspan="3">1490</td> <td colspan="3">1490</td> </tr> <tr> <td>15</td> <td>Overall height</td> <td colspan="3">2245</td> <td colspan="3">2245</td> <td colspan="3">2395</td> </tr> <tr> <td>16</td> <td>Overall height (lowered)</td> <td colspan="3">2245</td> <td colspan="3">2245</td> <td colspan="3">2395</td> </tr> <tr> <td>17</td> <td>Overall height (extended)</td> <td colspan="3">4170</td> <td colspan="3">4170</td> <td colspan="3">4320</td> </tr> <tr> <td>18</td> <td>Overhead guard height</td> <td colspan="3">2250</td> <td colspan="3">2250</td> <td colspan="3">2250</td> </tr> <tr> <td>19</td> <td>Turning radius(outside)</td> <td colspan="3">2690</td> <td colspan="3">2720</td> <td colspan="3">2810</td> </tr> <tr> <td>20</td> <td>Min. right angle stacking aisle width (Add load length and clearance)</td> <td colspan="3">3240</td> <td colspan="3">3270</td> <td colspan="3">3365</td> </tr> </table>									9	Fork size	L×W×T 1070×150×50			1070×150×50			1070×150×55			10	Max tilt range	F/R 6/12			6/12			6/12			11	Fork overhang(Wheel center to fork face)	550			550			555			12	Rear overhang	520			560			560			13	Length to face of fork	3070			3110			3215			14	Overall width	1395			1490			1490			15	Overall height	2245			2245			2395			16	Overall height (lowered)	2245			2245			2395			17	Overall height (extended)	4170			4170			4320			18	Overhead guard height	2250			2250			2250			19	Turning radius(outside)	2690			2720			2810			20	Min. right angle stacking aisle width (Add load length and clearance)	3240			3270			3365													
9	Fork size	L×W×T 1070×150×50			1070×150×50			1070×150×55																																																																																																																																																	
10	Max tilt range	F/R 6/12			6/12			6/12																																																																																																																																																	
11	Fork overhang(Wheel center to fork face)	550			550			555																																																																																																																																																	
12	Rear overhang	520			560			560																																																																																																																																																	
13	Length to face of fork	3070			3110			3215																																																																																																																																																	
14	Overall width	1395			1490			1490																																																																																																																																																	
15	Overall height	2245			2245			2395																																																																																																																																																	
16	Overall height (lowered)	2245			2245			2395																																																																																																																																																	
17	Overall height (extended)	4170			4170			4320																																																																																																																																																	
18	Overhead guard height	2250			2250			2250																																																																																																																																																	
19	Turning radius(outside)	2690			2720			2810																																																																																																																																																	
20	Min. right angle stacking aisle width (Add load length and clearance)	3240			3270			3365																																																																																																																																																	
Performance		<table border="1"> <tr> <td>20</td> <td>Travel (No load)</td> <td colspan="3">0 ~ 25</td> <td colspan="3">0 ~ 26</td> <td colspan="3">0 ~ 26</td> </tr> <tr> <td>21</td> <td>Speed</td> <td colspan="3">440</td> <td colspan="3">460</td> <td colspan="3">440</td> </tr> <tr> <td>22</td> <td>Lifting (Full load)</td> <td colspan="3">460</td> <td colspan="3">480</td> <td colspan="3">400</td> </tr> <tr> <td>23</td> <td>Lowering (Full load)</td> <td colspan="3">500</td> <td colspan="3">500</td> <td colspan="3">500</td> </tr> <tr> <td>24</td> <td>Max.Drawbar Pull (Full load)</td> <td colspan="3">38200</td> <td colspan="3">35900</td> <td colspan="3">37200</td> </tr> <tr> <td>25</td> <td>Max.Gradeability (Full load)</td> <td colspan="3">20</td> <td colspan="3">20</td> <td colspan="3">20</td> </tr> </table>									20	Travel (No load)	0 ~ 25			0 ~ 26			0 ~ 26			21	Speed	440			460			440			22	Lifting (Full load)	460			480			400			23	Lowering (Full load)	500			500			500			24	Max.Drawbar Pull (Full load)	38200			35900			37200			25	Max.Gradeability (Full load)	20			20			20																																																																															
20	Travel (No load)	0 ~ 25			0 ~ 26			0 ~ 26																																																																																																																																																	
21	Speed	440			460			440																																																																																																																																																	
22	Lifting (Full load)	460			480			400																																																																																																																																																	
23	Lowering (Full load)	500			500			500																																																																																																																																																	
24	Max.Drawbar Pull (Full load)	38200			35900			37200																																																																																																																																																	
25	Max.Gradeability (Full load)	20			20			20																																																																																																																																																	
Chassis		<table border="1"> <tr> <td>25</td> <td>Tyres</td> <td colspan="3">8.25-15-14PR</td> <td colspan="3">300-15-14PR</td> <td colspan="3">300-15-14PR</td> </tr> <tr> <td>26</td> <td>Tread</td> <td colspan="3">7.00-12-12PR</td> <td colspan="3">7.00-12-12PR</td> <td colspan="3">7.00-12-12PR</td> </tr> <tr> <td>27</td> <td>Front</td> <td colspan="3">1160</td> <td colspan="3">1190</td> <td colspan="3">1190</td> </tr> <tr> <td>28</td> <td>Rear</td> <td colspan="3">1130</td> <td colspan="3">1130</td> <td colspan="3">1130</td> </tr> <tr> <td>29</td> <td>Wheelbase</td> <td colspan="3">2000</td> <td colspan="3">2000</td> <td colspan="3">2100</td> </tr> <tr> <td>30</td> <td>Ground clearance</td> <td colspan="3">170</td> <td colspan="3">170</td> <td colspan="3">170</td> </tr> <tr> <td>31</td> <td>Wheelbase center</td> <td colspan="3">230</td> <td colspan="3">230</td> <td colspan="3">230</td> </tr> </table>									25	Tyres	8.25-15-14PR			300-15-14PR			300-15-14PR			26	Tread	7.00-12-12PR			7.00-12-12PR			7.00-12-12PR			27	Front	1160			1190			1190			28	Rear	1130			1130			1130			29	Wheelbase	2000			2000			2100			30	Ground clearance	170			170			170			31	Wheelbase center	230			230			230																																																																				
25	Tyres	8.25-15-14PR			300-15-14PR			300-15-14PR																																																																																																																																																	
26	Tread	7.00-12-12PR			7.00-12-12PR			7.00-12-12PR																																																																																																																																																	
27	Front	1160			1190			1190																																																																																																																																																	
28	Rear	1130			1130			1130																																																																																																																																																	
29	Wheelbase	2000			2000			2100																																																																																																																																																	
30	Ground clearance	170			170			170																																																																																																																																																	
31	Wheelbase center	230			230			230																																																																																																																																																	
Weight		<table border="1"> <tr> <td>32</td> <td>Self weight</td> <td colspan="3">6300</td> <td colspan="3">6500</td> <td colspan="3">6750</td> </tr> <tr> <td>33</td> <td>Weight Full load</td> <td colspan="3">9000 / 1300</td> <td colspan="3">9625 / 1375</td> <td colspan="3">10125 / 1475</td> </tr> <tr> <td>34</td> <td>Distribution No load</td> <td colspan="3">2800 / 3500</td> <td colspan="3">2820 / 3680</td> <td colspan="3">2820 / 3780</td> </tr> <tr> <td>35</td> <td>Battery Voltage/Capacity(20HR)</td> <td colspan="3">24 / 70 / 20h</td> <td colspan="3">24 / 70 / 20h</td> <td colspan="3">24 / 70 / 20h</td> </tr> </table>									32	Self weight	6300			6500			6750			33	Weight Full load	9000 / 1300			9625 / 1375			10125 / 1475			34	Distribution No load	2800 / 3500			2820 / 3680			2820 / 3780			35	Battery Voltage/Capacity(20HR)	24 / 70 / 20h			24 / 70 / 20h			24 / 70 / 20h																																																																																																					
32	Self weight	6300			6500			6750																																																																																																																																																	
33	Weight Full load	9000 / 1300			9625 / 1375			10125 / 1475																																																																																																																																																	
34	Distribution No load	2800 / 3500			2820 / 3680			2820 / 3780																																																																																																																																																	
35	Battery Voltage/Capacity(20HR)	24 / 70 / 20h			24 / 70 / 20h			24 / 70 / 20h																																																																																																																																																	
Power & transmission		<table border="1"> <tr> <td>36</td> <td>Model</td> <td colspan="3">B3.3T TD42</td> <td colspan="3">B3.3T TD42</td> <td colspan="3">B3.3T TD42</td> </tr> <tr> <td>37</td> <td>Manufacture</td> <td colspan="3">COMMINS NISSAN XINCHAI</td> <td colspan="3">COMMINS NISSAN XINCHAI</td> <td colspan="3">COMMINS NISSAN XINCHAI</td> </tr> <tr> <td>38</td> <td>Rated output / r.p.m.</td> <td colspan="3">60 / 2200</td> <td colspan="3">62.5 / 2300</td> <td colspan="3">60 / 2200</td> </tr> <tr> <td>39</td> <td>Rated torque / r.p.m.</td> <td colspan="3">292 / 1600</td> <td colspan="3">285 / 1400</td> <td colspan="3">292 / 1600</td> </tr> <tr> <td>40</td> <td>No. of cylinder</td> <td colspan="3">4</td> <td colspan="3">4</td> <td colspan="3">4</td> </tr> <tr> <td>41</td> <td>Bore×Stroke</td> <td colspan="3">95×115</td> <td colspan="3">96×125</td> <td colspan="3">95×115</td> </tr> <tr> <td>42</td> <td>Emission STD.</td> <td colspan="3">EURO II / EPA II</td> <td colspan="3">EURO II / EPA II</td> <td colspan="3">EURO II / EPA II</td> </tr> <tr> <td>43</td> <td>Displacement</td> <td colspan="3">3300</td> <td colspan="3">4169</td> <td colspan="3">3300</td> </tr> <tr> <td>44</td> <td>Fuel tank capacity</td> <td colspan="3">80</td> <td colspan="3">80</td> <td colspan="3">80</td> </tr> <tr> <td>45</td> <td>Manufacture</td> <td colspan="3">CHINA</td> <td colspan="3">CHINA</td> <td colspan="3">CHINA</td> </tr> <tr> <td>46</td> <td>Transmissions Type</td> <td colspan="3">Powershift</td> <td colspan="3">Powershift</td> <td colspan="3">Powershift</td> </tr> <tr> <td>47</td> <td>Stage</td> <td colspan="3">2 / 1</td> <td colspan="3">2 / 1</td> <td colspan="3">2 / 1</td> </tr> <tr> <td>48</td> <td>Operating pressure For attachments</td> <td colspan="3">18</td> <td colspan="3">18</td> <td colspan="3">18</td> </tr> </table>									36	Model	B3.3T TD42			B3.3T TD42			B3.3T TD42			37	Manufacture	COMMINS NISSAN XINCHAI			COMMINS NISSAN XINCHAI			COMMINS NISSAN XINCHAI			38	Rated output / r.p.m.	60 / 2200			62.5 / 2300			60 / 2200			39	Rated torque / r.p.m.	292 / 1600			285 / 1400			292 / 1600			40	No. of cylinder	4			4			4			41	Bore×Stroke	95×115			96×125			95×115			42	Emission STD.	EURO II / EPA II			EURO II / EPA II			EURO II / EPA II			43	Displacement	3300			4169			3300			44	Fuel tank capacity	80			80			80			45	Manufacture	CHINA			CHINA			CHINA			46	Transmissions Type	Powershift			Powershift			Powershift			47	Stage	2 / 1			2 / 1			2 / 1			48	Operating pressure For attachments	18			18			18		
36	Model	B3.3T TD42			B3.3T TD42			B3.3T TD42																																																																																																																																																	
37	Manufacture	COMMINS NISSAN XINCHAI			COMMINS NISSAN XINCHAI			COMMINS NISSAN XINCHAI																																																																																																																																																	
38	Rated output / r.p.m.	60 / 2200			62.5 / 2300			60 / 2200																																																																																																																																																	
39	Rated torque / r.p.m.	292 / 1600			285 / 1400			292 / 1600																																																																																																																																																	
40	No. of cylinder	4			4			4																																																																																																																																																	
41	Bore×Stroke	95×115			96×125			95×115																																																																																																																																																	
42	Emission STD.	EURO II / EPA II			EURO II / EPA II			EURO II / EPA II																																																																																																																																																	
43	Displacement	3300			4169			3300																																																																																																																																																	
44	Fuel tank capacity	80			80			80																																																																																																																																																	
45	Manufacture	CHINA			CHINA			CHINA																																																																																																																																																	
46	Transmissions Type	Powershift			Powershift			Powershift																																																																																																																																																	
47	Stage	2 / 1			2 / 1			2 / 1																																																																																																																																																	
48	Operating pressure For attachments	18			18			18																																																																																																																																																	


1. Special lifting height available (2-stage mast: 2.5m, 2.7m, 3.0m, 3.3m, 3.6m, 4m, 4.5m. 3-stage mast: 4.3m, 4.5m, 4.8m, 5m, 5.5m, 6m) 2. Attachment available.
3. The specification in the table are for standard models only. For further information please contact us. 4. Specification are subject to change without notice.

F or more than 30 years, ZHEJIANG HANGCHA ENGINEERING MACHINERY CO., LTD. Has played a leading role in the manufacture and production of Chinese forklift industry. We constantly strive to develop and incorporate the latest advances in forklift design and technology to ensure that our products provide an optimum level of performance, all the time. Our new generation R series of forklifts truly exemplifies this commitment to excellence.

LOAD CHART

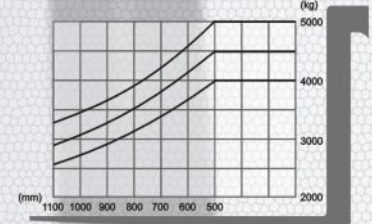

DIMENSIONS

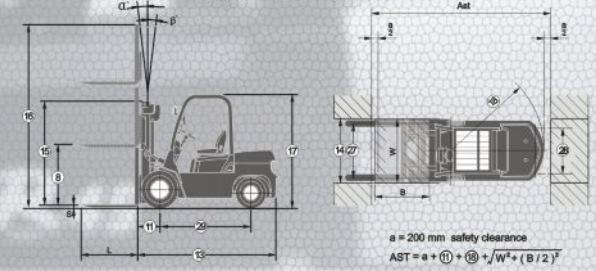

4.0 ~ 5.0t R series mast: (pneumatic)

Type	Model	Max. Fork height	Overall height												Free lift				Tilt range		Capacity					
			Lowered		Extended				Without backrest		With backrest		Front Overhang		FWD	BWD	Load capacity at 500 mm									
			mm	mm	Without backrest		With backrest		mm	mm	mm	mm	mm	mm			Deg	Deg	Single tire		Double tire					
					4 / 4.5t	5t	4 / 4.5t	5t							4 / 4.5t	5t			4t	4.5t	5t	5t				
Wide view mast	R45 / 50M250	2500	1995	2145	3330	3495	3670	3820	160	160	160	160	550	555	6	12	4000	4500	5000	4000	4500	5000				
	R45 / 50M270	2700	2095	2245	3530	3695	3870	4020	160	160	160	160	550	555	6	12	4000	4500	5000	4000	4500	5000				
	R45 / 50M300	3000	2245	2395	3830	3995	4170	4320	160	160	160	160	550	555	6	12	4000	4500	5000	4000	4500	5000				
	R45 / 50M330	3300	2395	2545	4130	4295	4470	4620	160	160	160	160	550	555	6	12	4000	4500	5000	4000	4500	5000				
	R45 / 50M350	3500	2495	2645	4330	4495	4670	4820	160	160	160	160	550	555	6	12	4000	4500	5000	4000	4500	5000				
	R45 / 50M360	3600	2545	2695	4430	4595	4770	4920	160	160	160	160	550	555	6	12	4000	4500	5000	4000	4500	5000				
	R45 / 50M400	4000	2795	2895	4830	4995	5170	5320	160	160	160	160	550	555	6	12	3800	4250	4750	4000	4500	5000				
	R45 / 50M430	4300	2960	3045	5130	5295	5470	5620	160	160	160	160	550	555	6	6	3600	4000	4500	3800	4250	4750				
	R45 / 50M450	4500	3070	3145	5330	5495	5670	5820	160	160	160	160	550	555	6	6	3400	3800	4250	3600	4050	4500				
	R45 / 50M480	4800	3235	3295	5630	5795	5970	6120	160	160	160	160	550	555	6	6	3000	3350	3750	3200	3600	4000				
Wide view full free 2-stage mast	R45 / 50M500	5000	3345	3395	5830	5995	6170	6320	160	160	160	160	550	555	6	6	2800	3150	3500	3000	3400	3750				
	R45 / 50U300	3000	2225	2375	3870	4035	4168	4318	1365	1365	1055	1055	565	570	6	12	4000	4500	5000	4000	4500	5000				
	R45 / 50U330	3300	2375	2525	4170	4335	4468	4618	1500	1500	1205	1205	565	570	6	12	4000	4500	5000	4000	4500	5000				
Wide view full free 3-stage mast	R45 / 50N430	4300	2205	2305	5205	5355	5490	5640	1325	1275	1034	840	603	615	6	6	3400	3800	4250	3600	4050	4500				
	R45 / 50N450	4500	2270	2370	5400	5550	5690	5840	1390	1340	1100	910	603	615	6	6	3200	3600	4000	3400	3850	4250				
	R45 / 50N480	4800	2365	2465	5700	5850	5990	6140	1485	1435	1195	1005	603	615	6	6	3000	3350	3750	3200	3600	4000				
	R45 / 50N500	5000	2435	2535	5900	6050	6190	6340	1555	1505	1264	1070	603	615	6	6	2800	3150	3500	3000	3400	3750				
	R45 / 50N550	5500	2600	2700	6400	6550	6690	6840	1720	1670	1430	1240	603	615	3	6	2250	2550	2850	2800	3100	3350				
	R45 / 50N600	6000	2815	2915	6945	7095	7190	7340	1935	1885	1644	1450	603	615	3	6	1700	1950	2200	2600	2800	2950				

With sideshifter minus 200Kg, with integral sideshifter minus 100Kg.

