A Series Rough Terrain Pallet Truck

T

AIS

TT

with capacity of 1,500kg

The World of Hangcha



HANGCHA GROUP CO., LTD.

Factory site: 666 Xiangfu Road, Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755 Fax: +86-571-88926789 88132890

sales@hcforklift.com www.hcforklift.com



HANGCHA GROUP CO., LTD. reserves the right to make any changes without notice concerning colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.



INNOVATIVE LITHIUM-ION

HANGCHA





HANGCHA PROVIDES **3 YEAR OR 6000 HOURS** GUARANTEE ON LITHIUM BATTERY.





INNOVATIVE SOLUTIONS NEW POWER NOW


- / We use square lithium iron phosphate batteries and modules used in large quantities by commercial vehicles in mature economies.
- / Safe and effective: Charging efficiency as high as 95%./ Quick charging.
- / Long-working: 2000 charging cycles, capacity retention greater than 80%.
- / Maintenance-free: Battery does not require manual maintenance.
- $\space{-1.5ex}$ / Green and clean: Pollution-free, zero emissions.



Rapid charging and opportunity charging ensure continuous availability of vehicles

Allow for fast full charging or boost charging. They are maintenance free and do not require a battery change when used for multi-shift operations.



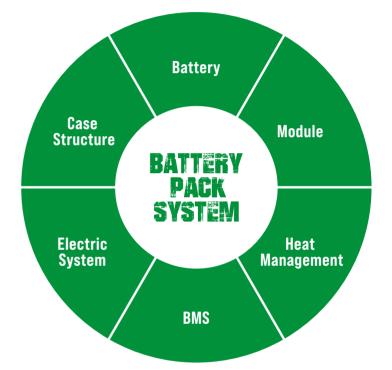

A SERIES ROUGH TERRAIN PALLET TRUCK

The 1.5t A series electric powered rough terrain pallet truck is mainly designed to meet the transportation needs of industries such as civil engineering and infrastructure. It has good stability and strong obstacle crossing ability, making it suitable for complex and harsh outdoor conditions, breaking through the limitations of traditional pallet trucks that are only suitable for indoor warehouses and workshops.



The pallet truck adopts DC brushless traction control technology, combined with advanced lithium battery technology, to achieve fast charging, safe and reliable, and low maintenance costs; The large-sized rubber solid tire ensures high passability and excellent protective performance, making it an ideal tool for outdoor loading and unloading and handling of palletized goods.

> ptimized design of low height mast, with large distance between fork-arms wide field of view provides excellent ergonomics.

> > 2 44 7

Exterior

Following the family style appearance of the A series, the lines are strong and smooth, the entire truck is simple and atmospheric, three-dimensional and full, with a fashionable and stable design.

Als







The front wheels are equipped with deep groove rubber tires, with large ground clearance, wear resistance and durability, and good shock absorption effect.

Comfort

- Multifunctional instrument, integrated display of battery power, working hours.
- Pedestrian mode, adopting a low and long handle design, with low steering force and easy operation.
- 3 The use of mold springs as rebound components ensures stable and reliable performance with low operating force.



ADVANCED AND SAFE

GRADEABILITY (unladen) The traction and main controller with DC brushless control system, combined with a high-performance planetary gearbox, with strong power, high climbing slope, superior acceleration performance, and efficient environmental protection.

Table of the battery features				
Capacity (Ah)	48V			
20 (lithium battery)	•			
50 (Gel battery)	0			


The pallet truck is equipped with 48V voltage system, with low motor current, less heat generation, and lower losses under laden and unladen lifting conditions. Release braking, reverse braking, and emergency braking to ensure the safety of driving.

The battery adopts lithium iron phosphate battery cells, which have good stability, safety, and efficiency.

The reinforced design of the frame and the covering parts are all made of steel plate stamping forming technology, with superior protective performance.









d with high-performance lithium s efficient and energy-saving; It has narging time and high usage efficiency.



The strength of important components such as the frame and mast has been double verified through CAE analysis and strengthening tests.





The emergency reverse button on the head of the handle can effectively prevent the driver from being injured when encountering emergency situations.

The components and connectors of the electrical system are mostly designed with high protection levels and placed inside the covering parts. The waterproof level reaches IPX4, which can meet the needs of outdoor operations.

The shigh passability and excellent obstacle crossing ability, which can meet the pages of autidopy off med conditions


The approach angle of the truck reaches 41°, the departure angle reaches 23°, and the passing angle reaches 20°, which is larger than that of conventional pallet truck.



Larger width, small turning radius, flexible operation, and superior lateral stability.

The ground clearance reaches **100mm**

The lifting height reaches **250mm**



41°

20°

23°

Maintenance

- 1 The full opened hood makes battery replacement and maintenance more convenient.
- 2 Built-in charger as standard, making charging more convenient and efficient.
- 3 DC brushless motor without carbon brush, superior maintenance performance.









A Series Rough Terrain Pallet Truck Specification

	1.1	Manufacturer		HANGCHA GROUP CO.,LTD.
	1.2	Manufacturer's type designation		CBD15-AMC1-IRT
hing	1.4	Operator type: hand, pedestrian, standing, seated, order-picker		Pedestrian
nguisl mark	1.5	Rated capacity/rated load	Q (kg)	1500
Distinguishing mark	1.6	Load centre distance	c (mm)	500
-	1.8	Load distance, centre of drive axle to fork	x (mm)	667
	1.9	Wheelbase	y (mm)	1197
4	2.1	Service Weight	kg	440
Weight	2.2	Axle loading, laden front/rear	kg	460/1480
5	2.3	Axle loading, unladen front/rear	kg	240/200
	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane		solid rubber
assis	3.2	Tyre size, front		φ250×80
Tyres/chassis	3.3	Tyre size, rear		φ399×104
Tyre	3.5	Wheels, number front / rear (x = driven wheels)		1x/2
	3.7	Tread, rear	b11 (mm)	1230
	4.4	Lift	h3 (mm)	250
	4.19	Overall length	lı (mm)	1773
	4.20	Length to face of forks	l2 (mm)	703
suo	4.21	Overall width	b1/b2(mm)	546/1390
Dimensions	4.22	Fork dimensions	s/e/l (mm)	35/100/1070
i	4.25	Distance between fork-arms	b5 (mm)	210~850
	4.32	Ground clearance, centre of wheelbase	m2 (mm)	100
	4.34.2	Aisle width for pallets 800 x 1200 lengthways	Ast (mm)	2112
	4.35	Turning radius	Wa (mm)	1410
ta	5.1	Travel speed, laden/unladen	km/h	5.5/5.5
ce da	5.2	Lift speed, laden/unladen	m/s	0.046/0.061
Performance data	5.3	Lowering speed, laden/unladen	m/s	0.056/0.058
erfor	5.8	Max. gradeability, laden/unladen	%	6/10
<u> </u>		Parking brake		Electric
	6.1	Drive motor rating S2 60 min	kW	1
gine	6.2	Lift motor rating at S3 15%	kW	1.5
Electric-engine	6.4	Battery voltage, nominal capacity K5	V/Ah	48/20
ectric	6.5	Battery weight	kg	11.4
l H	8.1	Type of drive unit		DC
	9.1	Manufacturer/Type		Curtis /1226BL

Features

Truck	Standard	Options
Ø399*104 solid rubber load wheel	•	
Φ250*80 solid rubber traction wheel	•	
Iron stamping cover, iron stamping rear wheel cover	•	
Build-in charger	•	
48V/20Ah lithium battery	•	
Walking upright	•	
Integrated hydraulic unit	•	
48V/50Ah Gel battery		0
Φ300*80 solid rubber wheel		0
Load backrest		0
Distance between outer width of legs		0
Fork length: 1150, 1250mm		0
Controls and instruments		
Multifunctional instrument	•	
Curtis controller	•	
Emergency power-off switch	•	
Key	•	
Lifting limit with electric switch	•	
Tiller with CANBUS structure	•	
Safety		
Horn		

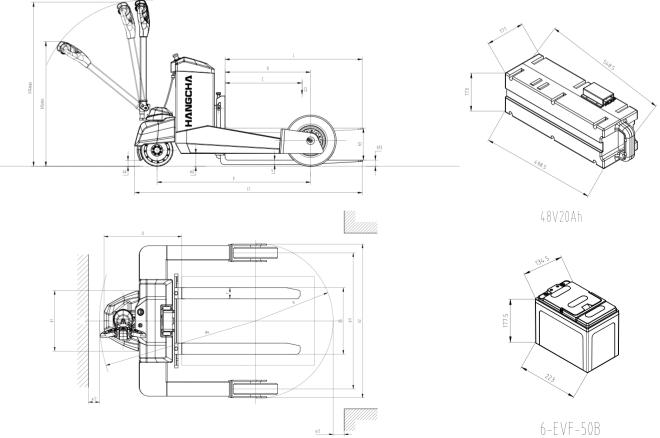

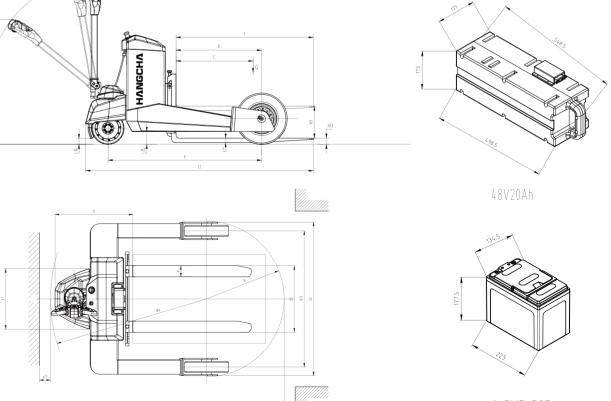

a/2